


# VL SERIES

- Prevent dust from the side.

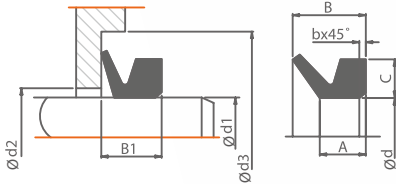

MATERIAL	NBR	FKM
Hardness(Shore A)	60	60
Color	Black	Brown
Temperature Range (°C )	-30 to 100	-20 to 200

VL SIZE	d1	d	c	A	B	d2	d3	B1
VL-110	105.0-115.0	99.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-120	115.0-125.0	108.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-130	125.0-135.0	117.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-140	135.0-145.0	126.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-150	145.0-155.0	135.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-160	155.0-165.0	144.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-170	165.0-175.0	153.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-180	175.0-185.0	162.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-190	185.0-195.0	171.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-200	195.0-210.0	182.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-220	210.0-233.0	198.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-250	233.0-260.0	225.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-275	260.0-285.0	247.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-300	285.0-310.0	270.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-325	310.0-335.0	292.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-350	335.0-365.0	315.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-375	365.0-385.0	337.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-400	385.0-410.0	360.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-425	410.0-440.0	382.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-450	440.0-480.0	405.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-500	480.0-530.0	450.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-525	510.0-540.0	472.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-550	530.0-580.0	495.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5
VL-600	580.0-630.0	540.0	6.5	6.0	10.5	C+5	C+20	8.0±1.5